


Barrier Gate (Speedy)

(SHSB-1V3/6)

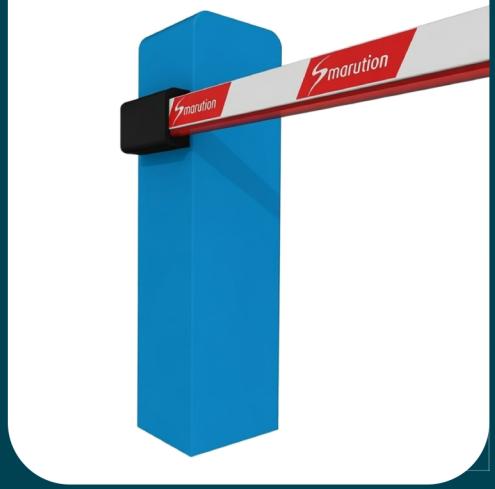

SPECIFICATION

Power supply	In:220Vac 50/60Hz	Out:24VDC
Max Power	300W	
Current	Max Load Current: 5A	
Controller	D03 V Servo	
Motor	Servo with Encoder	
Arm	3m	6m
Speed	1.5 s	6 s
Crash	Anti-crash ,Auto-fix (optional)	
Safety	Photocell or Loop (optional)	
Light	Full Arm LED RGB light	
Duty cycle	100%- MTBF 2Milion Cycle	
Protection	Over-Under voltage, Overcurrent (CB 10A)	
Communication	Serial 232/485	
IP	54	
Working temp	-25/+45 (°C)	
Size (H x W x D)	1200x300x385 mm	
Wight	40 kg	
Certificates	ISO, CE, NCR	
Display	Indicator Arrow Screen	
Material	Galvanized Steel 2mm	
Paint	Electrostatic RAL 5012	
Origin	Made in Egypt	

DESCRIPTION

High-performance Automatic Barrier Gate solution, Malls, Hotels, Commercial parking or high-end residential complex. With servo motor technology 1.5s speed and the 2-million-cycle durability, arm from 3 to 6 meter, you are moving into the "Industrial/Professional" grade of access control.

KEY COMPONENTS

- Simplicity, easy installation & maintenance.
- Integrate with PMS Communicating.
- Linked with Fire Alarm system.
- High Speed Gate 1.5s.
- Durable 2M cycle no maintenance.
- Serve Motor Technology with Encoder.
- Anti-crash arm with auto fix option.
- Sensitivity to touch or resistance.

DIMENSION

